



# User Manual

[www.doughty-engineering.co.uk](http://www.doughty-engineering.co.uk)


## T57001 / T57011 Slimline Coupler




Version 01/11

[www.doughty-engineering.co.uk](http://www.doughty-engineering.co.uk)

NB: The TUV Certificate endorses T57001 Polished coupler only.

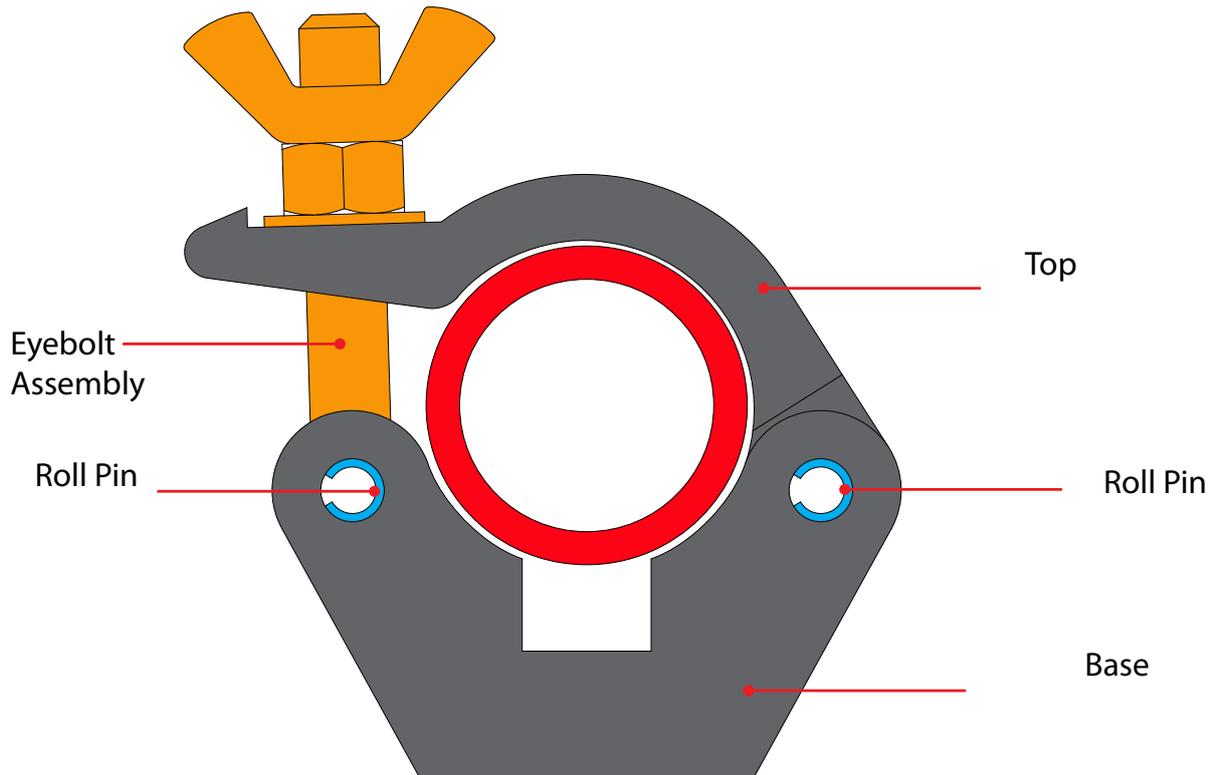


Year of Manufacturer  
i.e. - 09 = 2009  
**10 = 2010**  
11 = 2011

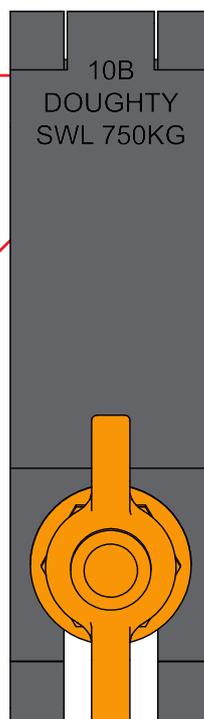



Month of Manufacturer  
i.e. - A = Jan  
**B = Feb**  
C = March


1. Never exceed the Safe Working Load (SWL) shown on the clamp.
2. Only use the clamp within the designed tube parameters (48-51mm)
3. All clamps should be visually inspected before use. In the event of any damage the clamp should be taken out of service and returned to an 'Approved Doughty Service Agent' for inspection. (see our dealer locator on our web site for a comprehensive list of Authorised Service Agents)
4. When used in conjunction with other accessories, care must be taken to ensure that the minimum SWL of any component is not exceeded.
5. Doughty Engineering Ltd does not recommend using any clamps which do not fully encompass the tube for overhanging. All open clamps including hookclamps should be used in a vertical orientation only.

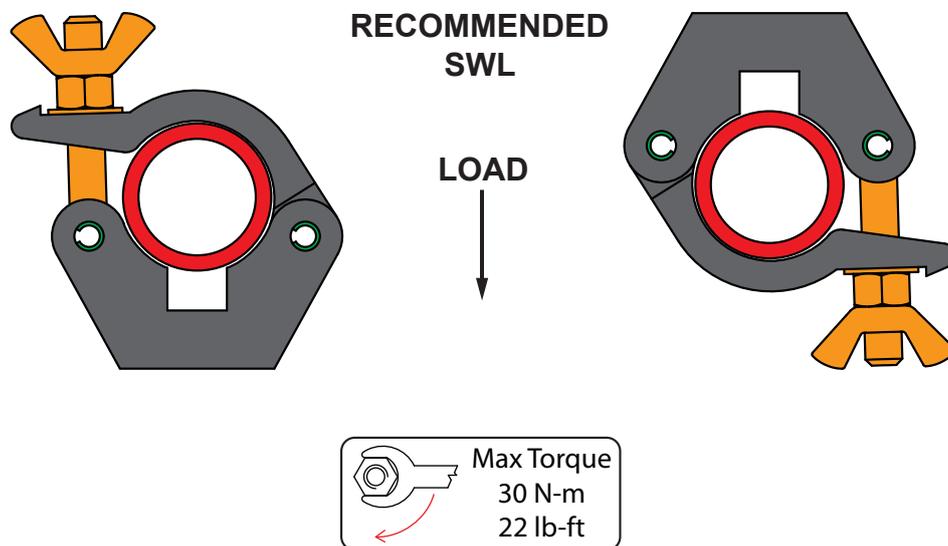

THE FOLLOWING APPLICATIONS WILL RESULT IN THE RECOMMENDED SWL BEING REDUCED DEPENDANT ON THE TUBE SURFACE FINISH & TORQUE SETTINGS APPLIED. PROOF LOADING ON INSTALLATIONS IS RECOMMENDED.

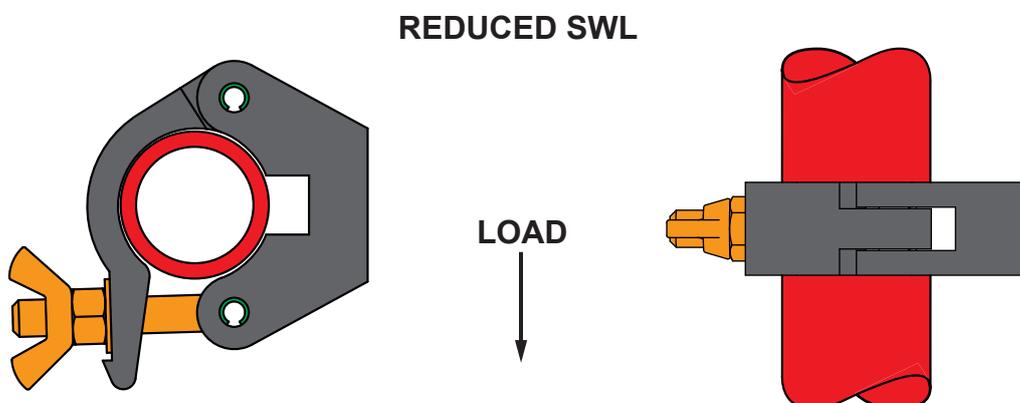

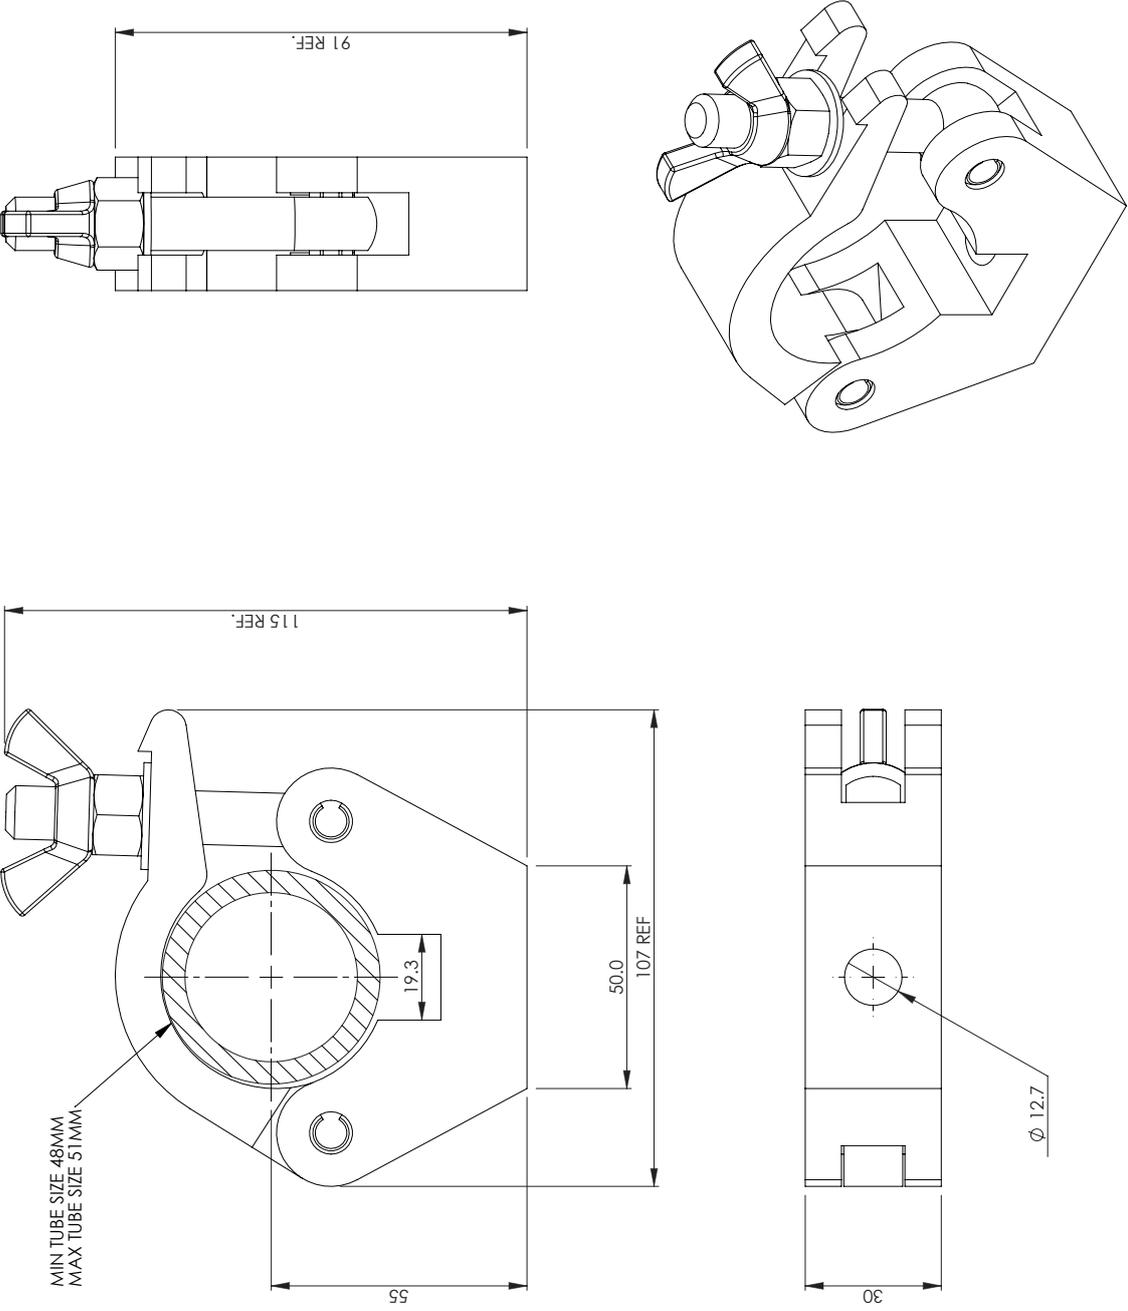 DOUGHTY ENGINEERING LTD	<p><b>DATA SHEET</b></p>	TITLE: SLIMLINE DOUGHTY CLAMP 30MM	PART NOS: 157001	MATERIAL : ALUMINIUM	WEIGHT: 0.41 KG	SWL: 750 KG	FINISH: POLISHED	NOTES: MIN TUBE SIZE - 48MM MAX TUBE SIZE - 51MM	<p><b>STRICTLY FOR REFERENCE PURPOSES ONLY</b></p>	 THIRD ANGLE PROJECTION
										

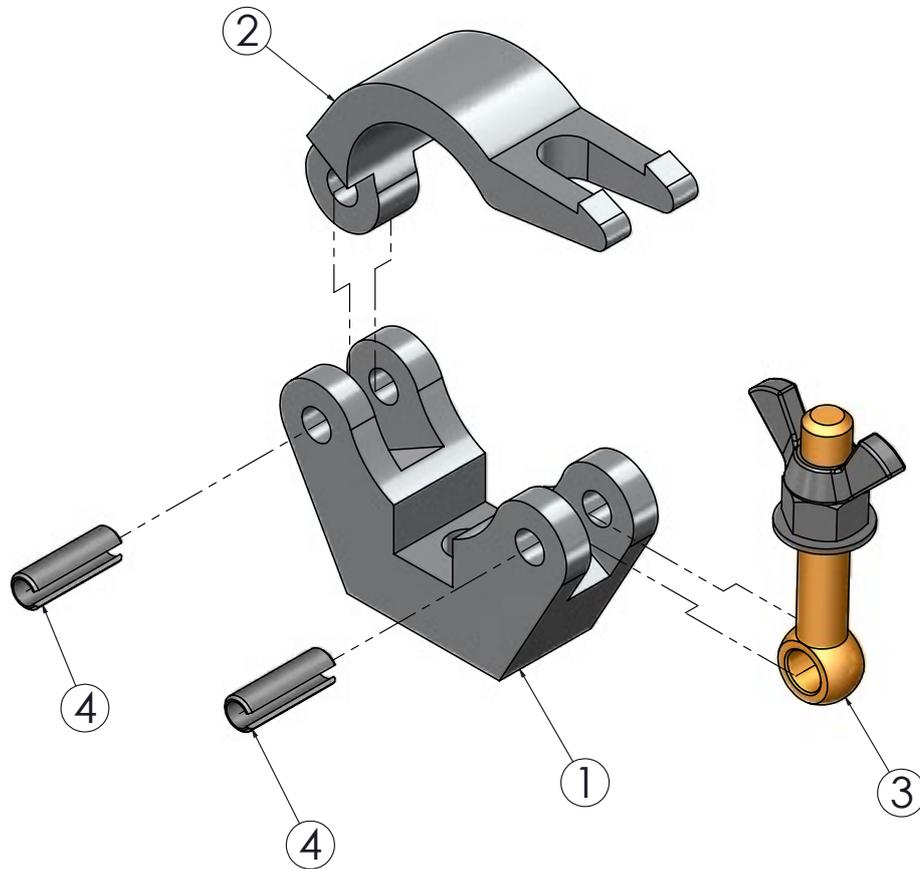

DOUGHTY PRODUCTS MUST ONLY BE SERVICED / REPAIRED BY  
AN AUTHORISED SERVICE AGENT.  
SPARE PARTS ARE ONLY AVAILABLE TO THESE AGENTS

ITEM NO.	PART NUMBER	DESCRIPTION	Spares/QTY.
1	TH650	MACHINED SLIMLINE DOUGHTY CLAMP BASE	1
2	TH213	MACHINED SLIMLINE DOUGHTY CLAMP TOP	1
3	T78000	M12 X 70 EYEBOLT	1
4	F791	STAINLESS STEEL ROLLPIN 3/8" X 1 1/8"	2

<b>T57001 - SLIMLINE DOUGHTY CLAMP</b>		DRAWN	AW
		DATE	18/01/2011
	NOT TO SCALE	Rev	1



**Doughty Engineering Limited**

CROW ARCH LANE, RINGWOOD, HANTS, BH24 1NZ. ENGLAND

Telephone: +44 (0) 1425 478961 Fax: +44 (0) 1425 474481

www.doughty-engineering.co.uk

email:sales@doughty-engineering.co.uk

**EC DECLARATION OF CONFORMITY**

Doughty Engineering Limited hereby certify that the equipment stated below has been designed to comply with all relevant sections of the specifications referenced below and complies with all the applicable Essential Requirements of the EC Directives and amendments and the National Laws and Regulations adopting these Directives.

**Description:** Doughty Slimline Coupler

**Model/s:** Part No. T57001 / T57011

**SWL:** 750Kg      **Factor:** 5:1

are in conformity with the provision of the following EC Directives:

MACHINERY DIRECTIVE 98/37/EC

**Harmonised Standards applied:**

EN 292-1-2:1991

BS EN ISO 9001:1994

Safety Tested: DIN 31000 03.79

Safety Tested: DIN EN 74 12.88

**National Technical Standards & Specifications applied:**

BS 7905-1:2001

Signed:  Date:23-04-08

Name: Nigel Curtis      Position: Technical Director

Being the responsible person appointed by the manufacturer.



DEQ 083 Rev 4

Company Registration No. London 972614  
Registered Office: Crow Arch Lane, Ringwood, Hants, BH24 1NZ  
Directors: M.B.Lister. J.C.G. Chiverton. N.D. Curtis. S.C. Wright



# Certificate

No: B 99 03 20319 005



Doughty Engineering Ltd.

Crow Arch Lane  
Ringwood, Hampshire BH24 1NZ  
Great Britain

with production facilities  
20319

is authorized to label the following products with the  
certification mark E  
as shown in the certification mark list. See also notes overleaf.

Product: Rohrkupplungen für mechanische Verbindung  
Half couplers

Model: T57001 Slimline

Parameters:	Max. load capacity:	750kg
	Tube diameter:	48-50mm
	Width:	30mm
	Thickness of the bottom:	19mm
	Material:	6082 (ALSi1MgMn)
	Weight:	416g

The product meets the relevant safety requirements and was tested  
according to:

DIN 31000 03.79  
DIN EN 74 12.88 (in Anlehnung)

Report No: 01301602801, E - (B 99 03 20319 002)

Released with the above certificate number by the  
certification body of TÜV PRODUCT SERVICE GMBH.



Department: TFDEMA / MAS  
Date: 03-03-99

TÜV PRODUCT SERVICE GMBH · Zertifizierstelle · Ridlerstrasse 31 · D-80339 München



**Doughty Engineering Ltd**

Crow Arch Lane

Ringwood, Hampshire, BH24 1NZ

Tel: +44 (0) 1425 478961 Fax: +44 (0) 1425 474481

email: [sales@doughty-engineering.co.uk](mailto:sales@doughty-engineering.co.uk)

Web: [www.doughty-engineering.co.uk](http://www.doughty-engineering.co.uk)

Note: Whilst every effort has been made to ensure that the information contained within this manual is correct, Doughty Engineering does not accept any liability for errors or omissions. Specifications and technical data are intended for guidance purposes only and may vary.