


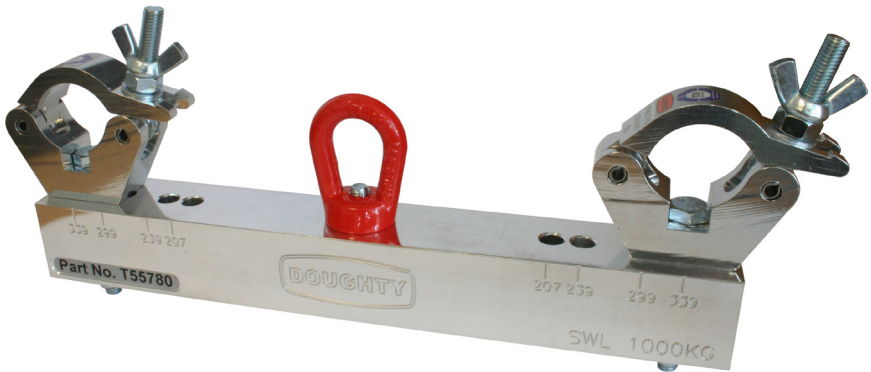

User Manual

www.doughty-engineering.co.uk

T55780/5 Solid Truss Adaptor (1000Kg)



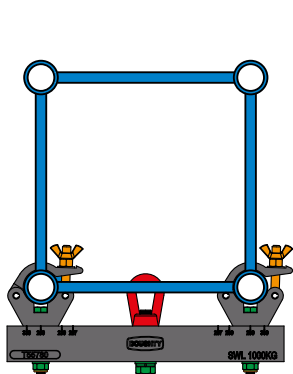
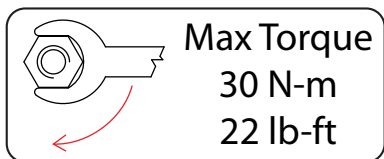
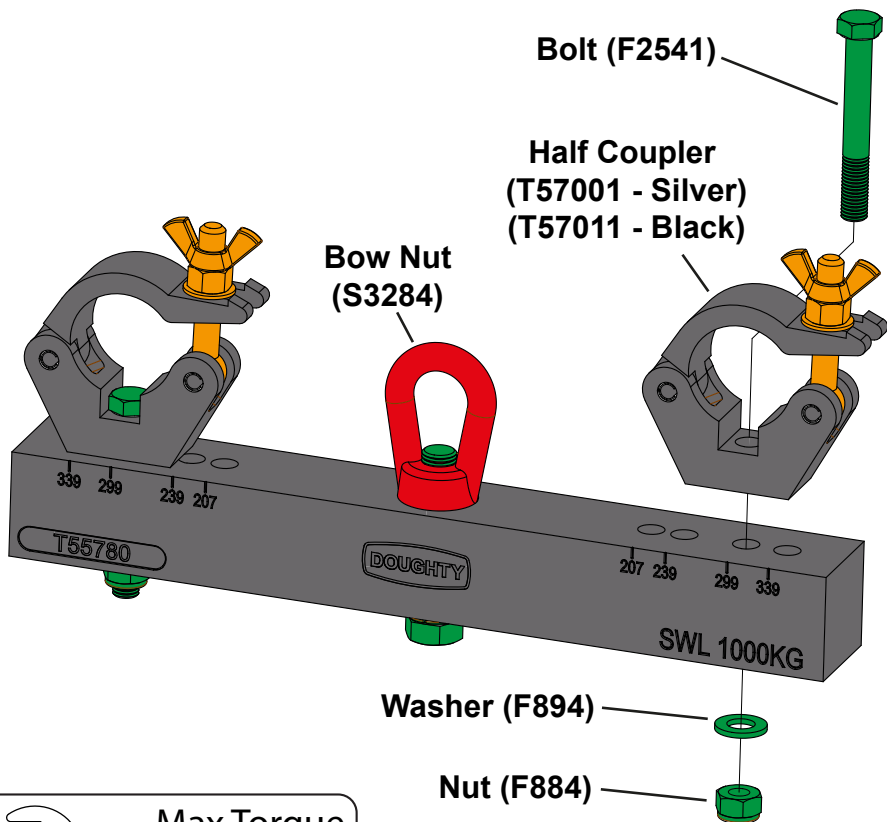


Fig 1.

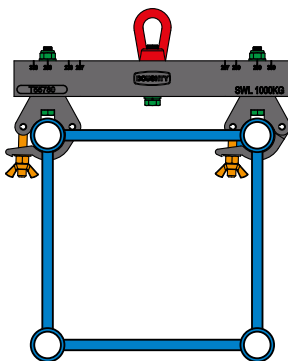


Fig 2.




Fig 3.

1. The Solid Truss Adaptor provides a safe means to lift/suspend a square or triangular truss.
2. The Truss Adaptor should only be used by a competent person.
3. The Truss Adaptor should be visually inspected before use. In the event of any damage the Truss Adaptor should be taken out of service.
4. The Truss Adaptor can be used with trusses with the following chords: 207, 239, 299 & 339mm ctrs.
For a comprehensive list of manufacturers' dimensions please visit www.doughty-engineering.co.uk
5. Should the Truss Adaptor need to be reconfigured for use as shown in Fig 2 & 3 only move the Couplers.

DO NOT MOVE THE BOW NUT

6. The coupler eyebolt and fixing bolts should not be tightened more than 30N-m.
7. When used in conjunction with other accessories, care must be taken to ensure that the SWL of any component is not exceeded.
8. Truss Adaptors are available th the following sizes:

T55720 - 250Kg Truss Adaptor - Silver

T55725 - 250Kg Truss Adaptor - Black

T55750 - 500Kg Truss Adaptor - Silver

T55755 - 500Kg Truss Adaptor - Black

T55780 - 1000Kg Truss Adaptor - Silver

T55785 - 1000Kg Truss Adaptor - Black



Doughty Engineering Ltd

Crow Arch Lane

Ringwood, Hampshire, BH24 1NZ

Tel: +44 (0) 1425 478961 Fax: +44 (0) 1425 474481

email: sales@doughty-engineering.co.uk

Web: www.doughty-engineering.co.uk

Note: Whilst every effort has been made to ensure that the information contained within this manual is correct, Doughty Engineering does not accept any liability for errors or omissions. Specifications and technical data are intended for guidance purposes only and may vary.